

RoHS compliant

REV


MODIFICATION

DATE


A0

ISSUE

2025.10.29

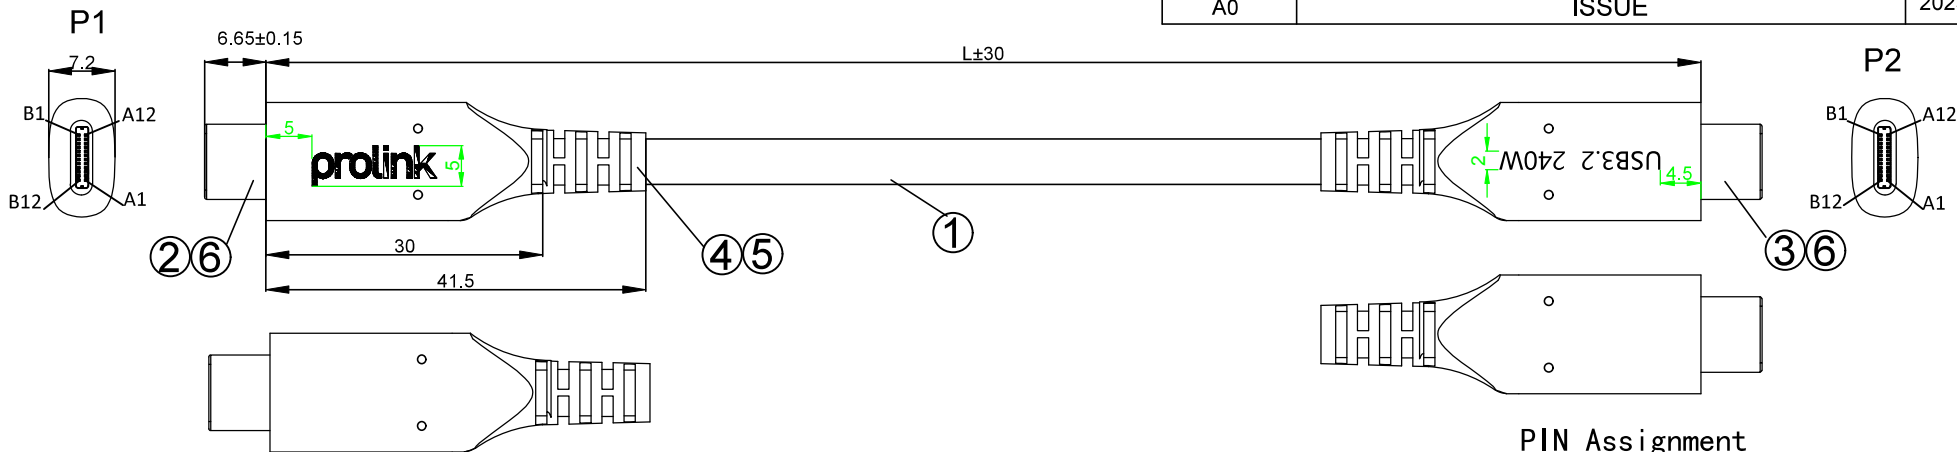

PIN Assignment

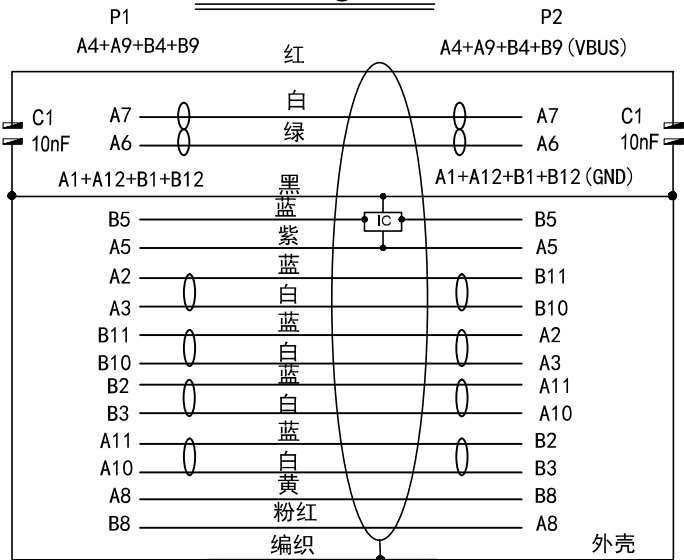

A. Electronic Tests:

- a. Open/Short/Intermittence: 100%
- b. Hi-Pot: AC 100V 0.01S 1mA
- c. Insulation Resistance: DC 300V 0.1S 10MΩ Min
- d. Conductive Resistance: 2Ω Max
- e. Display port practical application test:
PASS 4K*2K@120Hz with DSC

B. Feature

- a. Full feature USB3.2 (Gen 2x2) cable:
Transmission rate up to 20Gbps
- b. Resolution 3840*2160*60Hz
- c. Backwards compatible with USB3.2, 3.0 and 2.0 and Thunderbolt 3
- d. Supports USB power deliver 3.2 48V5A/240W
- e. RoHS 2011/65/EU and amendment directives (EU)
2015/863 compliant: REACH 1907/2006/EC compliant

P/N CHART

HX P/N	P/N	L±T
201930267	CL1200WH-0050	500±30
201930268	CL1200WH-0080	800±30
201930269	CL1200WH-1000	1000±30
201930270	CL1200WH-1500	1500±30
201930271	CL1200WH-2000	2000±30

⑥	DUST CAP	Dust cap for Type C Male plug	2	PCS			
⑤	Over molding	45P White PVC	A/R	g	角法 PROJ:	容 忍 公 差 TOLERANCE: XX= XXX=	产 品 名 称 PRODUCT NAME: SEE " P/N CHART"
④	Inner molding	LD PE	A/R	g	比 例 SCALE: NONE	版 本 REV: A	产 品 料 号 PART NO: SEE " P/N CHART"
③	CONN.2	U4 Type C Male, Gold-plated contacts, Nickel-plated shell + Tinplate. IC: HUSB332D	1	PCS	单 位 UNIT: MM	页 次 SHEET: 1/1	客 户 CUST:
②	CONN.1	U4 Type C Male, Gold-plated contacts, Nickel-plated iron shell + Tinplate	1	PCS	客 户 回 签 SUST APPROVED:		Ningbo FTZ Tianning Technological Electronics Co. Ltd
①	CABLE	(7/0.08T*1P+AL+HM)*4C+7/0.08T1P+7/0.08T*4C+41/0.08T*2C+ 4D(41/0.08T), Graphene conductive tape, Black PVC, OD 4.5mm+White Fabric Braiding	L	MM	核 准 APPROVED:		
					审 核 CHECKED:		
NO	NAME	SPECIFICATION	Q'TY	UNIT	制 图 DRAWING:	YUCHENG SHI 2025.10.29	